

## TRANSFORMERS

### 20 & 30 VA Transformer MKT Series

#### Specifications

##### Wire Size

All leads are 18 AWG stranded  
2/64" insulation thickness

##### Quick Connect Size

Standard male quick connect terminals  
are .250" x .032"

Optional .187" x .020" available

##### Frequency

50/60 Hz

##### Insulation System

130°C Class B

Mek-Tronics Class II transformers supply secondary voltages that are commonly utilized in various electronic, electro-magnetic and electrical control conditions. These include applications used with relays, solenoids, small motors, speed changers, pumps, heating elements, fans and blowers, electronic tubes, elevators, door openers and Thermostat control.

#### Features

- UL/CUL recognized 5085—File No. E528105, Class 2 or 3.
- Multiple mounting and termination options available, contact us for more information.



## TRANSFORMERS

### 20 & 30 VA Transformer MKT Series



Color	Black	White	Red	Orange	Brown	Black/Red	Grey
Lead Length	12"	12"	12"	12"	12"	12"	12"
Strip Length	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"

Color	Blue	Yellow
Lead Length	12"	12"
Strip Length	1/2"	1/2"

#### Dimensions (inches [mm])

##### Quick Connect Models

<b>A DIM</b>	2.26	2.67
<b>B DIM</b>	0.625	1.00

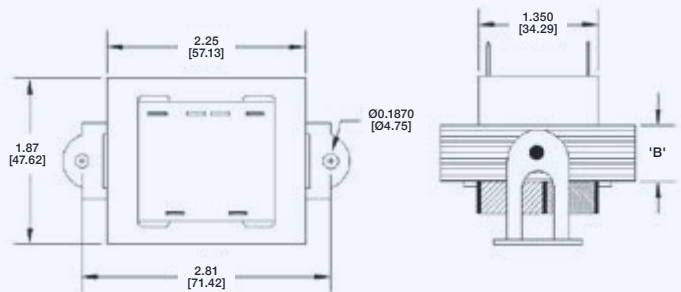

MeK-Tronics can design different types of transformers not listed in the above sheet. 847.598.3550 | [www.mek-tronics.com](http://www.mek-tronics.com)