



# MeK-Tronics

## TRANSFORMERS

### 40 & 50 VA Transformer MKT Series

#### Specifications

##### Wire Size

All leads are 18 AWG stranded  
2/64" insulation thickness

##### Quick Connect Size

Standard male quick connect terminals  
are .250" x .032"

##### Frequency

50/60 Hz

##### Insulation System

130°C Class B

##### Unit Weight

40 VA	24.32 oz
50 VA	33.60 oz

Mek-Tronics Class II transformers supply secondary voltages that are commonly utilized in various electronic, electro-magnetic and electrical control conditions. These include applications used with relays, solenoids, small motors, speed changers, pumps, heating elements, fans and blowers, electronic tubes, elevators, door openers and Thermostat control.

#### Features

- UL/CUL recognized 5085—File No. E528105, Class 2 UL 1585
- Inherently limited
- No secondary fusing required
- Multiple mounting and termination options available, contact us for more information.





# MeK-Tronics

## TRANSFORMERS


### 40 & 50 VA Transformer MKT Series

Color	Black	White	Red	Orange	Brown	Black/Red	Grey
Lead Length	12"	12"	12"	12"	12"	12"	12"
Strip Length	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"

Color	Blue	Yellow
Lead Length	12"	12"
Strip Length	1/2"	1/2"

#### Dimensions (inches [mm]) Quick Connect Models

<b>A DIM</b>	2.60	2.97
<b>B DIM</b>	.875	1.25

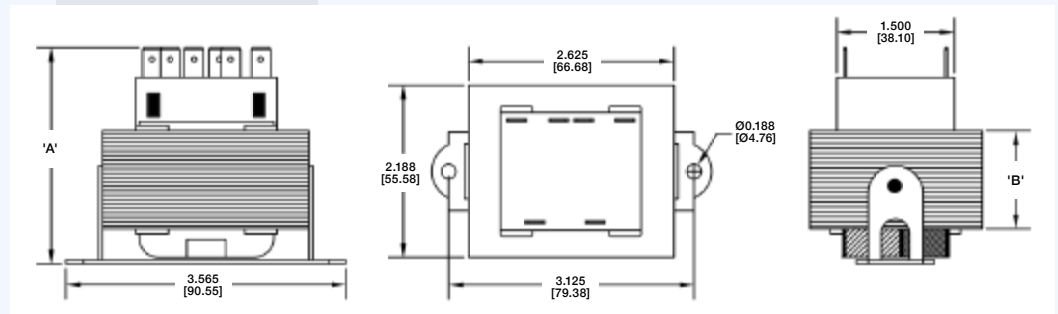

MeK-Tronics can design different types of transformers not listed in the above sheet. 847.598.3550 | [www.mek-tronics.com](http://www.mek-tronics.com)